

Balmoral Offset Lever Lever



Features

- Solid die cast construction with heavy duty spring cassette Sturdy feel and consistent 90 degree lever return
- Sculpted ergonomic lever and low friction nylon bush
 Easy to grip and smooth action
- Supplied with screw and spindle pack to suit 60-70mm profiles
 Everything needed for installation included
- Colour coordinated screw heads
 Perfectly matching hardware, even down to the smallest details
- Baseplate in common with all Balmoral handles
 Same routing detail regardless of product variant chosen
- Wide backplate
 To suit cylinder guards and accommodate larger cylinder preparation
- Supplied with care instructions
 Helps the homeowner to keep the hardware in optimal condition
- Supplied fully assembled
 Simple and quick installation, no need to fit springs or lever
- Silicon Site-Protectors available
 Ensures perfect condition after installation
- Each part packaged in a separate chamber, but supplied as a set No scratching of parts during transit















1A052

EXTERNAL DOORS

Balmoral Offset Lever Lever

Ordering Details		
Product		
Balmoral Offset Lever Lever		
Finish	Part No.	
Hardex Chrome	1D051	
Hardex Satin	1D052	
Hardex Bronze	1D053	
Hardex Gold	1D055	
Hardex Graphite	1D058	
Antique Black	1D056	
White (Zinc)	1D050	
White (Aluminium)	1A050	
Black	1A051	

Technical Information Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)

Operation

Silver


Endurance tested in excess of 200,000 cycles

Tested to meet the requirements of PAS 24 as part of a compliant door set. 30 minute fire test to BS 476: Part 20/22: 1987

30 Illillute life test to b3 470. Part 20/22. 1307	
Material Specification	
Handle Grip and Backplate:	High quality Zinc for all Hardex finishes, White and Antique Black. High quality Aluminium for White, Black and Silver finishes
Coatings:	Hardex Chrome, Hardex Satin, Hardex Bronze, Hardex Gold, Hardex Graphite, Antique Black, White, Black and Silver
Spindle / Screws:	Machine screws with colour coordinated heads for handle. 60mm - 70mm profiles (2 x 8mm x 90mm spindle; 2 x M5 x 70mm and 2x M5 x 80mm screws)
Cylinder:	Euro Cylinder, 92mm / 62mm PZ

Maintenance

For continued protection of the quality finish and appearance, Fab&Fix advise routine cleaning of all our external hardware. Moving parts should also be lightly lubricated at least twice a year. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

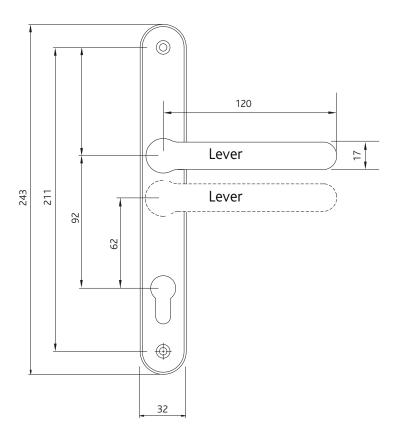

All dimensions are in mm and are nominal. Fab&Fix reserves the right to change specification without notice It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.

Packaging

Handles

Individually bagged with screws, spindle and care instructions. 15 handles in an outer box.