

# Nu Mail Letterplate



# **Features**

- Midrail and panel letterplate options to suit doors 20mm-80mm thick Suits a range of door thickness
- Fully colour matched metal letterplate Quality and durability you can see and feel
- Anti-snap flap opens to 180° with fully sprung return Easier to operate, no broken flaps, even with Sunday papers
- 12" letterplate with a 10" aperture Meets Royal Mail standards, will easily take A4 size post
- Fully weather Sealed (with rubber gasket)\* No draft, no rain water
- Secure through fixing ensures letterplate can only be removed from the inside of the
  - Prevents burglars gaining access to the cylinder internally
- · Can be through fixed or face fixed Flexible according to fabricator preference
- Outstanding acoustic insulation\* Perfect for flats, or houses near busy roads
- Supplied with screw fixings Everything needed for installation included
- · Secured by Design Additional peace of mind

\*For best acoustic and weather performance we recommend installing the product with a rubber gasket



Silver



Grey



Black



Hardex





Graphite



Black









Hardex Rose



Pewter











# Nu Mail Letterplate

#### **Ordering Details** Product Nu Mail Letterplate Finish Part No. Panel 68 Midrail 68 Panel 76 Midrail 76 (40-80)(20-40)(40-80)(20-40)Hardex Chrome 3C301 3C101 3C201 3C001 3C002 3C302 3C102 3C202 Hardex Satin Hardex Bronze 3C303 3C103 3C203 3C003 3C005 Hardex Gold 3C305 3C105 3C205 Hardex Graphite 3C311 3C111 3C211 3C018 Hardex Pewter 3C011 \_ DLPNMHRMI76 Hardex Rose Antique Black 3C306 3C106 3C206 3C006 Anthracite Grey 3C112 3C300 3C200 3C000 White 3C100 3C108 30008 Black 3C308 3C208 Silver 3C209 3C009 \*Easy Fit Rubber Drip Gasket 9B000

## **Technical Information**

#### Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)

#### Operation

Flap cycle tested to 30,000 cycles Conforms to the requirements of BS EN 13724: 2002

#### Performance

Tested as part of a complete door set that successfully achieved PAS 24. 30 minute fire test to BS 476: Part 20/22: 1987


#### Screws


Midrail version includes 2 x M5 x 45mm machine screws, 2 x M5 x 63mm machine screw, 2 x M5 x 74mm machine screws and 2 screw guides Panel version includes 2 x M5 x 28mm machine screws and 2 screw guides


<b>Material Specification</b>	
Frame and Flap:	High quality Zinc
Coatings:	Hardex Chrome, Hardex Satin, Hardex Bronze, Hardex Gold, Hardex Graphite, Hardex Pewter, Hardex Rose, Antique Black, Anthracite Grey, White, Black and Silver.

# **Maintenance**

For continued protection of the quality finish and appearance, Fab&Fix advise routine cleaning of all our external hardware. Moving parts should also be lightly lubricated at least twice a year. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

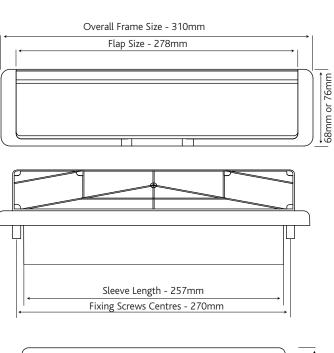



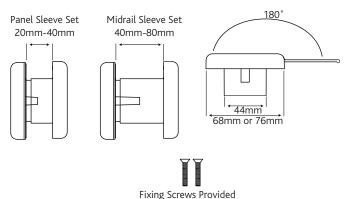

All dimensions are in mm and are nominal.

Fab&Fix reserves the right to change specification without notice
It is the responsibility of the door manufacturer to ensure that the
finished product meets any required safety and performance specification.

### **Packaging**

### Nu Mail Letterplate

Individually boxed with fixings and care instructions. 15 letterplates in an outer box.