CASENENT WINDOWS

# **Connoisseur Offset Non Locking**



### **Features**

- Solid die cast construction Heavyweight handle with sturdy feel
- · Heavy duty sprung latching wedge Positive click on closing
- Long handle Greater leverage and easy to operate without catching a hand on the window
- Classic design with a contemporary twist Create an elegant and stylish window
- Patented cover caps with colour coordinated finish Perfectly matching components, even down to the smallest details
- Slotted spindle (40mm version only) Allows cropping to 5mm increments
- Dedicated non locking handle Conforms to building regulations for non locking windows
- Supplied with screw and spindle pack Everything needed for installation included



Chrome



Hardex



Hardex Satin



Antique



Black



Hardex



White







CASENENT WINDOWS

# **Connoisseur Offset Non Locking**

Ordering Details  Product  Connoisseur Offset Non Locking				
Finish	Part No. Right Hand		Part No. Left Hand	
Spindle Size	30mm	40mm	30mm	40mm
Hardex Chrome Hardex Satin Hardex Bronze Hardex Gold Antique Black White Black Silver	0D661 0D662 0D663 0D665 0D666 0B660 0B661	0D681 0D682 0D683 0D685 0D686 0B680 0B681 0B682	0D811 0D812 0D813 0D815 0D816 0B810 0B811	OD831 OD832 OD833 OD835 OD836 OB830 OB831 OB832

For additional part numbers please contact our sales office.

Technical Information				
Corrosion resistance Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)				
Operation Endurance tested in excess of 50,000 cycles				
Performance Tested to meet the requirements of PAS 24 as part of a compliant window				
Material Specification				
Handle Grip and Backplate:	High quality Zinc for all Hardex finishes and Antique Black. High quality Aluminium for White, Black and Silver finishes			
Coatings:	Hardex Chrome, Satin, Bronze, Gold, Antique Black, White, Black and Silver			


#### Maintenance


For continued protection of the quality finish and appearance, Fab&Fix advise routine cleaning of all our external hardware. Moving parts should also be lightly lubricated at least twice a year. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

## **Packaging**

### Handles

Individually bagged with screws, cover caps and care instructions. 10 handles in an inner box, 40 handles in an outer box.

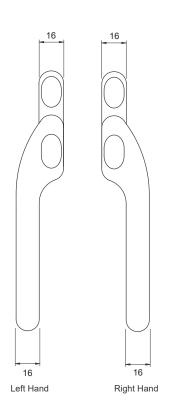

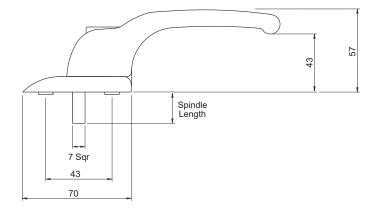



All dimensions are in mm and are nominal. Fab&Fix reserves the right to change specification without notice It is the responsibility of the window manufacturer to ensure that the finished product meets any required safety and performance specification.