

Monkey Window Tail Handle




Features


- **Elegant design inspired by 19th century ironmongery**
Classic finish to a heritage window
- **Strength tested to equivalent of a modern espagnolette window handle**
Stronger espagnolette operator
- **Manufactured from die-cast zinc with specially formulated finish**
Harder wearing finish than traditional wrought iron furniture
- **Key locking**
Security Enabled
- **Matching Monkey Tail Dummy Stay also available**
Creating perfectly matching heritage window




Hardex
Chrome



Hardex
Graphite



Hardex
Gold



Antique
Black

Monkey Tail Window Handle

Ordering Details

Product

Monkey Tail Window Handle

Finish	Part No.	
40mm Spindle	Left Hand	Right Hand
Hardex Chrome	8A077	8A078
Hardex Gold	8A075	8A076
Hardex Graphite	8A071	8A072
Antique Black	8A069	8A070
55mm Spindle	Left Hand	Right Hand
Hardex Chrome	8A128	8A129
Hardex Gold	8A126	8A127
Hardex Graphite	8A124	8A125
Antique Black	8A122	8A123

Technical Information

Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)

Operation

Tested to 25,000 cycles

Material Specification

Handle:	High quality Zinc for all finishes
Coatings:	Hardex Chrome, Hardex Graphite, Hardex Gold and Antique Black


Maintenance

For continued protection of the quality finish and appearance, Fab&Fix advise routine cleaning of all our external hardware. Moving parts should also be lightly lubricated at least twice a year. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

Packaging

Handles

Individually bagged with screws and care instructions.
40 handles in an outer box.

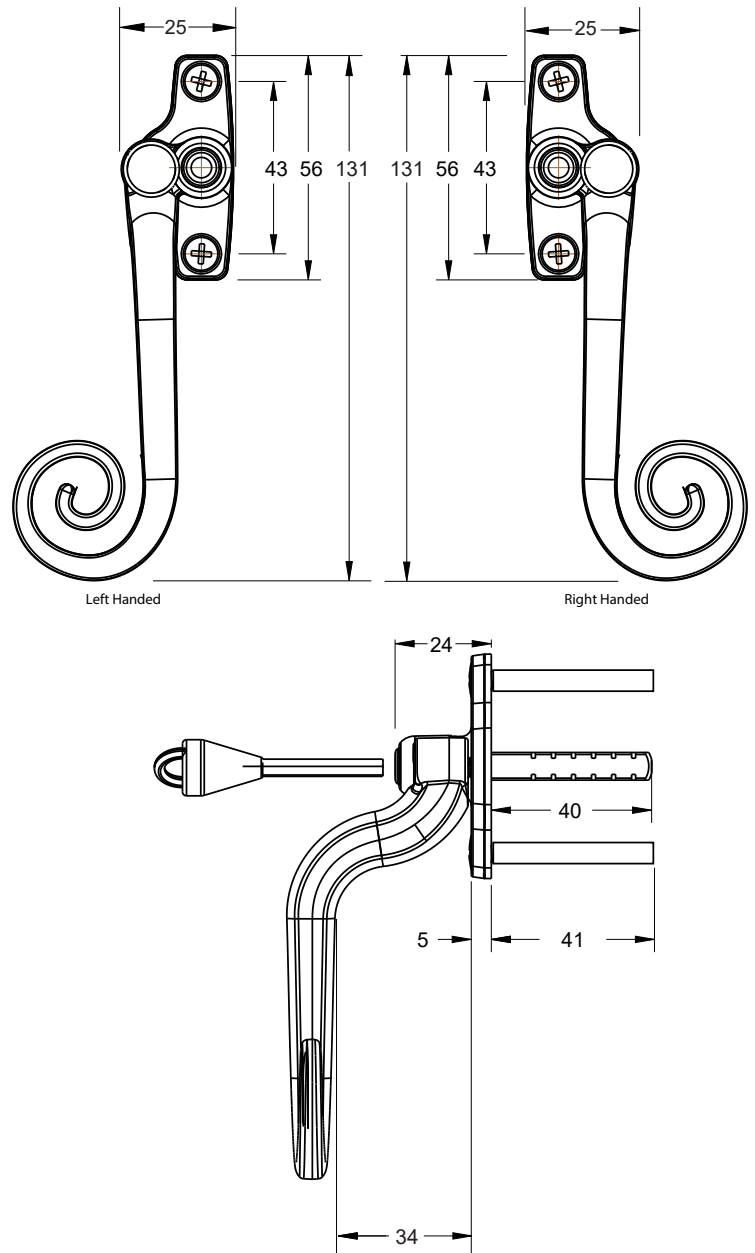

All dimensions are in mm and are nominal.
Fab&Fix reserves the right to change specification without notice.
It is the responsibility of the window manufacturer to ensure that the finished product meets any required safety and performance specification.