

### Maxim Tilt & Turn



### Features

- Elegant and robust operating handle designed specifically for tilt and turn window applications
- Designed for both residential and commercial applications providing a positive and secure operation for any window
- Ergonomically designed grip
- Available in locking, non-locking and tilt safe versions
- Tilt safe mode allows movement to the tilt position when locked, allowing ventilation without compromising safety
- Contracting range of finishes
- Tilt, turn or night vent position
- Locking and non locking versions
- High security locking cylinder

## Maxim Tilt & Turn

### Ordering Details


#### Maxim Tilt & Turn

#### Part No.

Finish	Locking	Non-locking (no button)	Tilt Safe
Black	WHMTBKxxILNBB	WHMTBKxxINNB	WHMTBKxxITNBB
Chrome	WHMTCHxxILNBB	WHMTCHxxINNB	WHMTCHxxITNBB
Gold	WHMTGxxILNBB	WHMTGxxINNB	WHMTGxxITNBB
Satin Chrome	WHMTSPxxILNBB	WHMTSPxxINNB	WHMTSPxxITNBB
White (Black Button)	WHMTWHxxILNBW	WHMTWHxxINNBW	WHMTWHxxITNBW
White (White Button)	WHMTWHxxILNWW	WHMTWHxxINNBW	WHMTWHxxITNWW

Non Locking Plug  
(Converts a locking handle to a non-locking) WAGRBL14800

**Note:** Add "XX" spindle length to complete code  
i.e. Maxim T&T White 30mm, Locking, Black Button, Black Gasket: WHMTWH30ILNBB

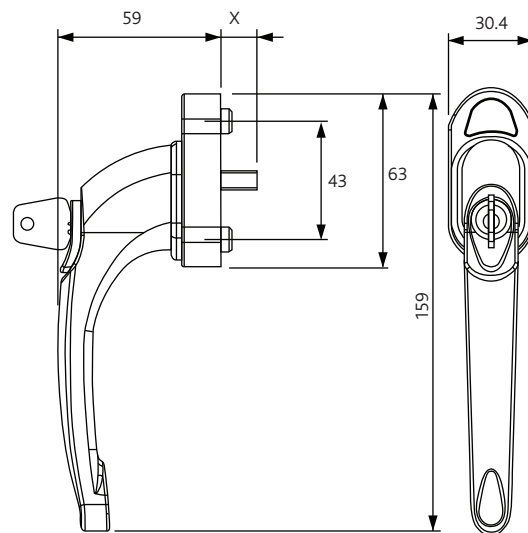

### Technical Information

#### Corrosion resistance

Meets the requirements of BS EN 1670:1998 Grade 3 (96 hours)

#### Operation

Tested in excess of 25,000 cycles

### Material Specification

Handle Grip and Backplate:	Zinc alloy casting to BS EN 12844:1999
Coatings:	Black - Powder paint coated RAL 9005, 60% gloss Polished Chrome - Bright chrome electroplated to BS12540:2000 Polished Gold Premier gold electroplated to BS12540:2000 Satin Chrome - Satin chrome electroplated to BS12540:2000 White - Powder paint coated RAL 9016, 60% gloss
Cylinder:	Plate nickel, key locking
Key:	Carbon steel, nickel plated
Backplate Washer:	Black or white nylon
Screw Cover:	Anodised or powder paint coated to suite

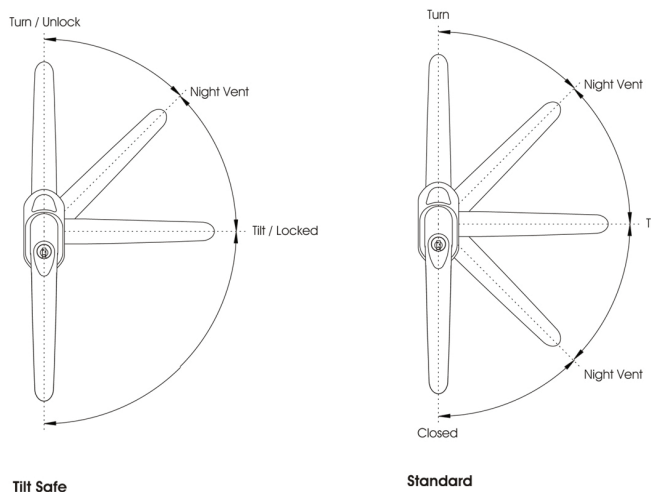


Diagram not to scale.

All dimensions are in mm and are nominal.

ERA reserves the right to change specification without notice

It is the responsibility of the window manufacturer to ensure that the finished product meets any required safety and performance specification.

### Packaging

#### Handle

25 per box

### Maintenance

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.