


High Security 3 Star Euro Profile Cylinder



Features

- The cleverly designed central cam, will only rotate with the use of the correct key. So stays locked until you choose to unlock the door
- Fitted with a sacrificial snap line, the external half of the cylinder will snap at a designated point when under attack, protecting the central cam from any unwanted access, but still allows anyone with the correct key to operate the cylinder internally
- Independently tested and certified in accordance with British Kitemark TS007:2014+A2:2018 3 Star accreditation (TS007 3*) and to BS EN 1303:2015
- 6-pin high security cylinder with anti-pick and anti-bump security pins; and anti-drill rods
- For ease of installation, the orientation is clearly marked on the cylinder, internal (INT) and external (EXT) and on an easy peel sticker
- Available in Satin Chrome, Polished Chrome or Satin Brass finishes, suitable for use with door handles with a Euro profile design
- Choice of single, double or thumbturn designs. Paired keyed alike cylinders for front and back door applications available
- Supplied with three strong nickel keys. Keys are uniquely coded to allow for ease of re-ordering replacement or additional keys
- BSI-approved re-pinning at ERA – keyed alike, master key or keyed to differ. Re-pinning kits also available.

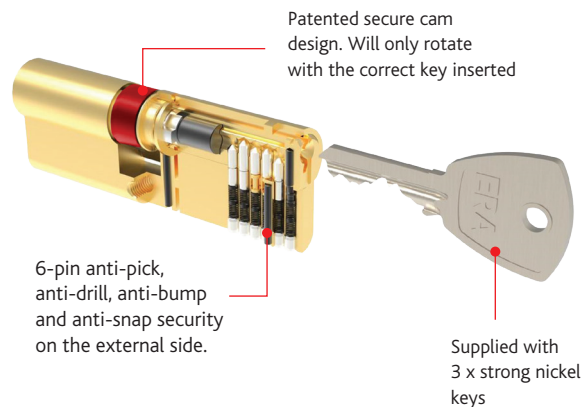

Classification

The ERA 3 Star high security cylinder carries the British Standard 3* Kitemark TS007:2014+A2:2018 and BS EN 1303:2015 accreditations.

Classification:

Category Of Use	1
Durability	6
Door Mass	0
Suitability of Fire resistant / Smoke Control Doors	1
Safety	0
Corrosion	C
Key Related Security	6
Attack Resistance	D



Security Coded Key.
6 Pin anti-pick, anti-drill,
anti-bump and anti-snap
security.



Certified British
Standard 3* Kitemark.
TS007:2014+A2:2018
and BS EN 1303:2015



Patented Cam
Design.
Will only rotate
with the correct key.



TS007:2014+A2:2018
BS EN 1303:2015

High Security 3 Star Euro Profile Cylinder

Ordering Details

Single

Dimensions			Finish	Part No.
Int	Ext	Overall		
10	35	45	Polished Chrome	DCY3SES1035PCSK
10	35	45	Satin Chrome	DCY3SES1035SCSK
10	35	45	Satin Brass	DCY3SES1035SBSK
10	**	-	Polished Chrome	DCY3SES10**PCSK
10	**	-	Satin Chrome	DCY3SES10**SCSK
10	**	-	Satin Brass	DCY3SES10**SBSK

** Denotes cylinder dimension. Please check with customer services for other sizes available.

Double

Dimensions			Finish	Part No.
Int	Ext	Overall		
37	37	74	Polished Chrome	DCY3SED3737PCSK
37	37	74	Satin Chrome	DCY3SED3737SCSK
37	37	74	Satin Brass	DCY3SED3737SBSK
40	40	80	Polished Chrome	DCY3SED4040PCSK
40	40	80	Satin Chrome	DCY3SED4040SCSK
40	40	80	Satin Brass	DCY3SED4040SBSK
45	45	90	Polished Chrome	DCY3SED4545PCSK
45	45	90	Satin Chrome	DCY3SED4545SCSK
45	45	90	Satin Brass	DCY3SED4545SBSK
50	50	100	Polished Chrome	DCY3SED5050PCSK
50	50	100	Satin Chrome	DCY3SED5050SCSK
50	50	100	Satin Brass	DCY3SED5050SBSK
50	40	90	Polished Chrome	DCY3SED5040PCSK
40	50	90	Satin Chrome	DCY3SED4050SCSK
40	50	90	Satin Brass	DCY3SED4050SBSK
**	**	-	Polished Chrome	DCY3SED****PCSK
**	**	-	Satin Chrome	DCY3SED****SCSK
**	**	-	Satin Brass	DCY3SED****SBSK

** Denotes cylinder dimension. Please check with customer services for other sizes available.

Thumbturn


Dimensions			Finish	Part No.
Int	Ext	Overall		
37	37	74	Polished Chrome	DCY3SET3737PCSK
37	37	74	Satin Chrome	DCY3SET3737SCSK
37	37	74	Satin Brass	DCY3SET3737SBSK
40	40	80	Polished Chrome	DCY3SET4040PCSK
40	40	80	Satin Chrome	DCY3SET4040SCSK
40	40	80	Satin Brass	DCY3SET4040SBSK
45	37	82	Polished Chrome	DCY3SET4537PCSK
45	37	82	Satin Chrome	DCY3SET4537SCSK
45	37	82	Satin Brass	DCY3SET4537SBSK
45	45	90	Polished Chrome	DCY3SET4545PCSK
45	45	90	Satin Chrome	DCY3SET4545SCSK
45	45	90	Satin Brass	DCY3SET4545SBSK
50	50	100	Polished Chrome	DCY3SET5050PCSK
50	50	100	Satin Chrome	DCY3SET5050SCSK
50	50	100	Satin Brass	DCY3SET5050SBSK
**	**	-	Polished Chrome	DCY3SET****PCSK
**	**	-	Satin Chrome	DCY3SET****SCSK
**	**	-	Satin Brass	DCY3SET****SBSK

** Denotes cylinder dimension. Please check with customer services for other sizes available.

Keys

3 Star Cylinder Key Blank	DCY3SKEYBLANK
3 Star Cylinder Cut Key - contact sales office	DCY3SCUTKEY

Part No: Internal measurement (INT) denotes first number

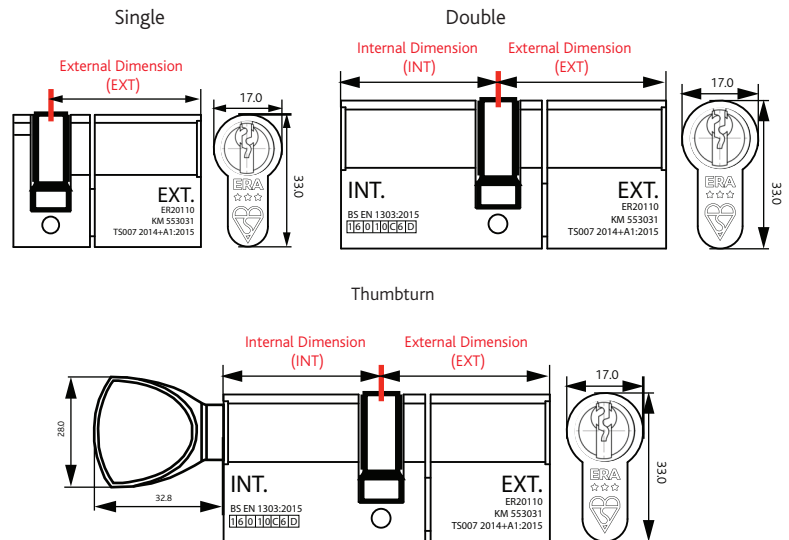

All dimensions are in mm and are nominal.

ERA reserves the right to change specification without notice.

It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.

Maintenance

Wipe the surface periodically with a soft cloth to remove excess grease or moisture.

Packaging

3 Star Cylinder

1 cylinder per box, 10 per outer box.

Technical Information

Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 3

Operation

Endurance tested in excess of 100,000 cycles

Performance

Independently tested to meet the requirements of BS EN 1303:2015 and accredited to TS007:2014+A2:2018 3*. BSI Kitemark License No. 553031. Designed to meet the requirements of PAS 24 in a compliant door set.

Material Specification

Cylinder Body:	Brass
Plug:	Brass
Key:	Nickel Silver
Thumbturn:	Brass
Cam:	Sintered Steel
Screw:	Nickel Plated Screws (45mm and 70mm)
Finish:	Polished Chrome, Satin Chrome and Satin Brass